





Kaba Mas

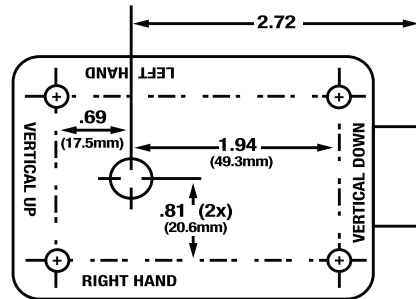

052

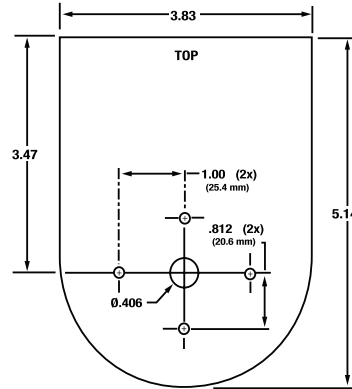

## 052

- UL Type I high security electronic locks
- Electronic Power Specifications; Solenoid driven and powered by PowerStar™ technology which is an internal generator that creates power when the dial is rotated. No battery is required for standard functions.
- Battery Assist: One 9-Volt Alkaline (not included) helps during Time Delay and Open Window periods. Also provides additional power during lengthy operations.
- Memory: Programmable non-volatile EEPROM.
- Temperature: -31° F to +66° C
- Mechanical Specifications: 2-piece lock case (cover & box), solid cast zinc, flash and chromate conversion coat for corrosion resistance. Tested to 25,000 cycles. Designed to meet industry standard safe lock mounting pattern footprints. • Outside Vertical Housing: UV stabilized poly carbonate.

- Keypad: Silicone rubber, 12-button tactile keypad, red and green LEDs reinforced with an audible signal (beep) for communications with Kaba logo face.
- Bolt: Dead bolt is solid brass with a manual return without screw holes for boltwork.
- Relocker Plate: Universal relocker that fits most major safe manufacturer applications furnished standard.

### Keypad Functions

- Numerical Keypad: Rapid Entry.
- Penalty Time Lockout: The lock will not allow access to any user for a period of 3 minutes after 5 incorrect combinations are entered. Any additional consecutive failed entry attempts result in another 3 minute lockout.
- Users: Two users. 6 digit combination length: Users select their own changeable combination. • Dual Custody: Two-Person Integrity, which requires two users to open the lock.
- Manager/User Operation: Allows manager to add, delete, enable or disable an additional user.

## 252

- All the functions of the 052 plus these additional features.
- Time Delay: 1-99 minute delay after entering in correct combination, 1-20 minute opening window. May require battery assist.
- Users: Twenty users. 8 digit combination length.
- Time delay override
- Audit Trail: 100 audits. Requires optional 30110 Auditcon 2 Series Software Implementation Package which includes: SA key, key reader, and key reader adapter.
- 30110 Software Functions: Program Lock Setup Options, Add/Delete Users, Audit Download Reports, User Table Download Reports

Mfg #	Users	Digits	Time Delay	Audit Trail	EZ #
052SVN10N5BEA1A	2	6	No	No	067660
252SVN10N5BEA1A	20	8	Yes	Yes	067663