




Select Hinges




- Pair-Matched™ hinge leaves: Manufactured together, machined together and anodized together.
- Anodized after machining: Delivers superior wear, durability and life. Inhibits corrosion.
- Templated hole pattern: Hole pattern is identical on both Standard and Heavy Duty models.
- Fire Rating: UL® tested and certified to Fire Rating Standards UL10B, UL10C and UBC 7.2 (positive and negative pressure) in the U.S. and Canada. 3 Hour Fire Rating
- Ideal for retrofit or new installations.




SL11 HD

- Concealed surface mount. No mortise required. Requires 5/16" clearance at hinge side between door and frame.
- Flush mounted (no door inset). Alignment stop on each leaf.

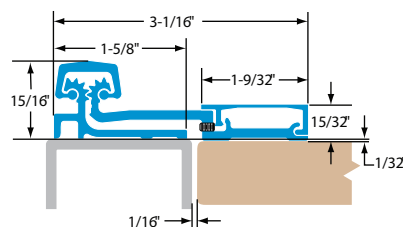

SL21 & SL21 HD

- Surface mount on face of existing or new door frame.
- 1/32" door inset. Swing-clear action. Tamper-resistant, removable door leaf cover.



SL57 & SL57 HD

- Surface mount on face of existing or new door frame.
- 1/16" door inset, center pivot. Fits narrow (7/8") frame face. Tamper resistant, removable door leaf cover.

Load/Frequency Rating

Standard Duty

Up to 200 lb., medium frequency

Heavy Duty (HD):

Up to 200 lb., high frequency

Up to 400 lb., medium frequency

Up to 600 lb., low frequency

Mfg #	Heavy Duty	Finish	EZ #
Concealed Surface Mount			
SL11BR HD83SDTF	Yes	Bronze	069106
SL11CL HD83SDTF	Yes	Clear	069105
Surface Mount			
SL21HD CLEAR83	Yes	Clear	065573
SL21CLEAR 83	No	Clear	028831
SL21DURO83	No	Duronodic	028832
Surface Mount Center Pivot			
SL57CLEAR 83"	No	Clear	030528
SL57DURO	No	Duronodic	030529
SL57HD CLEAR 83	Yes	Clear	030530